



HENRAD
Panel Radiators

HENRAD Compact Panel



The Compact radiator is the most popular in the Henrad range. Compact is fully dressed with side panels and a decorative upper grille that seamlessly join the radiator to a high standard of finish to suit any decor. The casing ensures the radiator surface temperature is safe to touch and child friendly.

The Compact range comes in a complete range of single, double or triple panel configurations to suit the heat output required, with stock readily available. A selection of different sizes and specification can be easily chosen to provide a complete home heating solution across multiple rooms as the huge range will fit any interior space, from 400mm to 3000mm wide and six heights up to 900mm.

Features & Benefits

- ▶ Made of high quality automotive steel resulting in higher anti corrosion properties
- ▶ Available in a range of heights from 300-900mm and widths from 400-3000mm to fit any interior space
- ▶ Available in single panel (type 11), double panel (type 21/22), or triple panel (type 33) for varied heat output
- ▶ Low temperature radiator covers available for childcare facilities, schools, aged care and hospitals
- ▶ Max operating pressure of 10 bar (tested to 13 bar)
- ▶ Safe max operating temperature of 110C
- ▶ Accreditation to international standard ISO 9002
- ▶ 25 Year Supplier's Warranty



Compact Double Panel Type 21



Side panels & upper grille



Suits quality Emmeti & Giacomini valves & connections



Colour Your Warmth

Customise your radiator to suit your decor with colour powder coating. Over 100 custom colours available.

Henrad Compact Heat Outputs

Use the heat outputs & dimensions guides to configure radiators to your available wall space & calculate heat outputs to suit each room area. Single Panel type radiators are ideal for heating small spaces or rooms, whereas Double and Triple Panel types have greater heat output to suit larger areas or areas with high ceilings. To further assist an online heat calculator is available at hydroheat.com.au



Heat outputs shown in WATTS, based on Inlet Temp 80°C / Outlet Temp 60°C / Room Temp 20°C



Single Panel Type 11

Depth 61mm

Length	Height						
	mm	300	400	500	600	700	900
400	204	270	333	392	447	544	
500	255	338	417	490	559	680	
600	305	406	500	588	670	816	
700	356	473	583	686	782	952	
800	407	541	666	784	894	1,088	
900	458	608	750	882	1,005	1,224	
1000	509	676	833	980	1,117	1,360	
1100	560	744	916	1,078	1,229	1,496	
1200	611	811	1,000	1,176	1,340	1,632	
1400	713	946	1,166	1,372	1,564	1,904	
1600	814	1,082	1,333	1,568	1,787	2,176	
1800	916	1,217	1,499	1,764	2,011	-	
2000	1,018	1,352	1,666	1,960	2,234	-	
2200	1,120	1,487	1,833	2,156	-	-	
2400	1,222	1,622	1,999	2,352	-	-	
2600	1,323	1,758	2,166	2,548	-	-	
2800	1,425	1,893	2,332	2,744	-	-	
3000	1,527	2,028	2,499	2,940	-	-	
Weight (kg)	9.31	12.78	16.24	19.70	22.90	29.30	
Volume (Lt)	1.89	2.34	2.80	3.25	3.77	4.80	



Double Panel Type 22

Depth 100mm

Length	Height						
	mm	300	400	500	600	700	900
400	393	498	598	693	784	958	
500	491	623	747	866	981	1,198	
600	589	747	896	1,039	1,177	1,437	
700	687	872	1,046	1,212	1,373	1,677	
800	786	996	1,195	1,386	1,569	1,916	
900	884	1,121	1,345	1,559	1,765	2,156	
1000	982	1,245	1,494	1,732	1,961	2,395	
1100	1,080	1,370	1,643	1,905	2,157	2,635	
1200	1,178	1,494	1,793	2,078	2,353	2,874	
1400	1,375	1,743	2,092	2,425	2,745	3,353	
1600	1,571	1,992	2,390	2,771	3,138	3,832	
1800	1,768	2,241	2,689	3,118	3,530	-	
2000	1,964	2,490	2,988	3,464	3,922	-	
2200	2,160	2,739	3,287	3,810	-	-	
2400	2,357	2,988	3,586	4,157	-	-	
2600	2,553	3,237	3,884	4,503	-	-	
2800	2,750	3,486	4,183	4,850	-	-	
3000	2,946	3,735	4,482	5,196	-	-	
Weight (kg)	16.80	22.87	28.93	35.00	40.53	51.60	
Volume (Lt)	3.70	4.67	5.63	6.60	7.63	9.70	



Double Panel Type 21

Depth 77mm

Length	Height					
	mm	400	500	600	700	900
400	382	461	538	612	753	
500	477	577	673	765	942	
600	572	692	807	918	1,130	
700	668	807	942	1,071	1,318	
800	763	922	1,076	1,224	1,506	
900	859	1,038	1,211	1,377	1,695	
1000	954	1,153	1,345	1,530	1,883	
1100	1,049	1,268	1,480	1,683	2,071	
1200	1,145	1,384	1,614	1,836	2,260	
1400	1,336	1,614	1,883	2,142	2,636	
1600	1,526	1,845	2,152	2,448	3,013	
1800	1,717	2,075	2,421	2,754	-	
2000	1,908	2,306	2,690	3,060	-	
2200	2,099	2,537	2,959	-	-	
2400	2,290	2,767	3,228	-	-	
2600	2,480	2,998	3,497	-	-	
2800	2,671	3,228	3,766	-	-	
3000	2,862	3,459	4,035	-	-	
Weight (kg)	19.46	24.63	29.80	34.50	43.90	
Volume (Lt)	4.67	5.63	6.60	7.63	9.70	



Triple Panel Type 33

Depth 158mm

Length	Height						
	mm	300	400	500	600	700	900
400	540	684	822	956	1,085	1,334	
500	675	856	1,028	1,195	1,356	1,667	
600	809	1,027	1,234	1,433	1,627	2,000	
700	944	1,198	1,439	1,672	1,898	2,334	
800	1,079	1,369	1,645	1,911	2,170	2,667	
900	1,214	1,540	1,850	2,150	2,441	3,001	
1000	1,349	1,711	2,056	2,389	2,712	3,334	
1100	1,484	1,882	2,262	2,628	2,983	3,667	
1200	1,619	2,053	2,467	2,867	3,254	4,001	
1400	1,889	2,395	2,878	3,345	3,797	4,668	
1600	2,158	2,738	3,290	3,822	4,339	5,334	
1800	2,428	3,080	3,701	4,300	4,882	-	
2000	2,698	3,422	4,112	4,778	5,424	-	
2200	2,968	3,764	4,523	5,256	-	-	
2400	3,238	4,106	4,934	5,734	-	-	
2600	3,507	4,449	5,346	6,211	-	-	
2800	3,777	4,791	5,757	6,689	-	-	
3000	4,047	5,133	6,168	7,167	-	-	
Weight (kg)	25.20	34.30	43.40	52.50	60.77	77.30	
Volume (Lt)	5.40	6.87	8.33	9.80	11.37	14.50	

HENRAD Premium ECO Panel




The Henrad Premium ECO range is one of the most efficient panel radiators on the market. The Premium ECO features a unique water flow distribution system which directs heated water to the front panel first, enabling the radiator to heat up to 23% faster than a standard panel radiator and maximising available energy.

The direct inflow, unique to the Henrad ECO radiator - means the water in the front panel maintains a higher temperature. As a result the radiator emits more radiated heat. This increased warmth still uses the same efficient hydronic system, increasing the overall efficiency whilst lowering energy bills and reducing CO emissions.


Features & Benefits

- ▶ Unique Premium ECO greater radiated heat up to 50%
- ▶ Higher average surface temperature in the front panel up to 53%
- ▶ Heats up to 23% faster, lowers energy bills by up to 12%
- ▶ Reduced energy loss / emissions from back panel up to 8.8%
- ▶ Pre-set thermostatic valve savings up to 6%
- ▶ Optional left or right side valve position
- ▶ Fully compatible with renewable energy sources
- ▶ Available in single panel (type 11), double panel (type 21/22), or triple panel (type 33) for varied heat output.
- ▶ Max operating pressure of 10 bar (tested to 13 bar)
- ▶ Safe max operating temperature of 110°C
- ▶ Accreditation to international standard ISO 9002
- ▶ 25 Year Supplier's Warranty

Premium ECO Double Panel Type 21

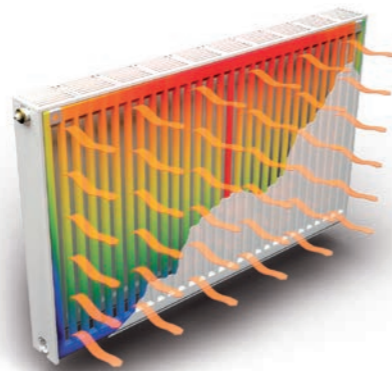

Unique rapid heat up and greater radiated heat by up to 50%



Higher average surface temperature of up to 53% in the front panel



Colour Your Warmth

Customise your radiator to suit your decor with colour powder coating. Over 100 custom colours available.

Henrad Premium ECO Heat Outputs

Use the heat outputs & dimensions guides to configure radiators to your available wall space & calculate heat outputs to suit each room area. Single Panel type radiators are ideal for heating small spaces or rooms, whereas Double and Triple Panel types have greater heat output to suit larger areas or areas with high ceilings. To further assist an online heat calculator is available at hydroheat.com.au



Heat outputs shown in WATTS, based on Inlet Temp 80°C / Outlet Temp 60°C / Room Temp 20°C



Single Panel Type 11

Depth 61mm


Length	Height						
	mm	300	400	500	600	700	900
400	204	270	333	392	447	544	
500	255	338	417	490	559	680	
600	305	406	500	588	670	816	
700	356	473	583	686	782	952	
800	407	541	666	784	894	1,088	
900	458	608	750	882	1,005	1,224	
1000	509	676	833	980	1,117	1,360	
1100	560	744	916	1,078	1,229	1,496	
1200	611	811	1,000	1,176	1,340	1,632	
1400	713	946	1,166	1,372	1,564	1,904	
1600	-	1,082	1,333	1,568	1,787	2,176	
1800	-	1,217	1,499	1,764	2,011	2,448	
2000	-	1,352	1,666	1,960	2,234	2,720	
2200	-	-	1,833	2,156	-	-	
2400	-	-	1,999	2,352	-	-	
<hr/>							
Weight (kg)	9.31	12.78	16.24	19.70	22.90	29.30	
Volume (Lt)	1.89	2.34	2.80	3.25	3.77	4.80	



Double Panel Type 21

Depth 77mm


Length	Height						
	mm	300	400	500	600	700	900
400	298	371	443	515	587	734	
500	372	464	554	644	734	918	
600	446	556	664	772	880	1,102	
700	521	649	775	901	1,027	1,285	
800	595	742	886	1,030	1,174	1,469	
900	670	834	996	1,158	1,320	1,652	
1000	744	927	1,107	1,287	1,467	1,836	
1100	818	1,020	1,218	1,416	1,614	2,020	
1200	893	1,112	1,328	1,544	1,760	2,203	
1400	1,042	1,298	1,550	1,802	2,054	2,570	
1600	1,190	1,483	1,771	2,059	2,347	2,938	
1800	1,339	1,669	1,993	2,317	2,641	3,305	
2000	1,488	1,854	2,214	2,574	2,934	3,672	
2200	1,637	2,039	2,435	2,831	-	-	
2400	1,786	2,225	2,657	3,089	-	-	
<hr/>							
Weight (kg)	14.30	18.83	23.37	27.90	32.70	42.30	
Volume (Lt)	3.80	4.80	5.80	6.80	7.57	9.10	



Double Panel Type 22

Depth 100mm

Length	Height						
	mm	300	400	500	600	700	900
400	373	469	560	647	730	888	
500	467	587	701	809	912	1,110	
600	560	704	841	970	1,094	1,332	
700	653	821	981	1,132	1,277	1,554	
800	746	938	1,121	1,294	1,459	1,776	
900	840	1,056	1,261	1,455	1,642	1,998	
1000	933	1,173	1,401	1,617	1,824	2,220	
1100	1,026	1,290	1,541	1,779	2,006	2,442	
1200	1,120	1,408	1,681	1,940	2,189	2,664	
1400	1,306	1,642	1,961	2,264	2,554	3,108	
1600	1,493	1,877	2,242	2,587	2,918	3,552	
1800	1,679	2,111	2,522	2,911	3,283	3,996	
2000	1,866	2,346	2,802	3,234	3,648	4,440	
2200	2,053	2,581	3,082	3,557	-	-	
2400	2,239	2,815	3,362	3,881	-	-	
2600	2,426	3,050	3,643	4,204	-	-	
2800	2,612	3,284	3,923	4,528	-	-	
3000	2,799	3,519	4,203	4,851	-	-	
<hr/>							
Weight (kg)	16.50	21.83	27.17	32.50	38.07	49.20	
Volume (Lt)	3.70	4.77	5.83	6.90	7.63	9.10	



Triple Panel Type 33

Depth 158mm

Length	Height						
	mm	300	400	500	600	700	900
400	539	674	803	925	1,043	1,272	
500	674	843	1,004	1,157	1,304	1,590	
600	808	1,012	1,204	1,388	1,564	1,908	
700	943	1,180	1,405	1,619	1,825	2,226	
800	1,078	1,349	1,606	1,850	2,086	2,544	
900	1,212	1,517	1,806	2,082	2,346	2,862	
1000	1,347	1,686	2,007	2,313	2,607	3,180	
1100	1,482	1,855	2,208	2,544	2,868	3,498	
1200	1,616	2,023	2,408	2,776	3,128	3,816	
1400	1,886	2,360	2,810	3,238	3,650	4,452	
1600	2,155	2,698	3,211	3,701	4,171	5,088	
1800	2,425	3,035	3,613	4,163	4,693	5,724	
2000	2,694	3,372	4,014	4,626	5,214	6,360	
2200	2,963	3,709	4,415	5,089	-	-	
2400	3,233	4,046	4,817	5,551	-	-	
2600	3,502	-	-	-	-	-	
2800	3,772	-	-	-	-	-	
3000	4,041	-	-	-	-	-	
<hr/>							
Weight (kg)	24.70	32.63	40.57	48.50	57.00	74.00	
Volume (Lt)	5.20	6.80	8.40	10.00	11.25	13.75	

For further specification and installation requirements visit hydroheat.com.au

Availability: Please check prior to ordering Accreditation: ISO 9002 Outputs: In accordance with EN442

HENRAD Everest Plan & Line Panel



The Everest Plan and Line deco panel range feature a modern and minimalist design approach. The flat fronts and closely fitting upper grille and side panels of the Everest range result in a sleek and timeless design. Everest Plan and Line are decorative radiators that create an atmosphere of light and space with simplicity that blends with modern decors. Everest Plan and Line can be connected either as a valved or as a compact radiator.

Both Plan and Line ranges feature the same efficiency of the Compact range, in a selection of single, double, or triple panel configurations, from 400mm to 3000mm wide and six heights up to 900mm.

Features & Benefits

- ▶ Everest panel radiators are available in flat Plan design or horizontal Line design
- ▶ Single, double and triple panels
- ▶ 6 heights from 300-900mm
- ▶ 18 standard lengths 400-3000mm
- ▶ Top grille and side panel on all models
- ▶ Max operating pressure of 10 bar (tested to 13 bar)
- ▶ Safe Max operating temperature of 110°C
- ▶ Accreditation to international standard ISO 9002
- ▶ 25 Year Supplier's Warranty

25 YEAR WARRANTY

Everest Plan Type 22 Double Panel



Everest Line Type 22 Double Panel



Sleek and timeless Plan design grille and side panel



Adjustable Emmeti & Giacomini valves control desired temperature



Colour Your Warmth

Customise your radiator to suit your decor with colour powder coating. Over 100 custom colours available.

Henrad Everest Plan Heat Outputs

Use the heat outputs & dimensions guides to configure radiators to your available wall space & calculate heat outputs to suit each room area. Single Panel type radiators are ideal for heating small spaces or rooms, whereas Double and Triple Panel types have greater heat output to suit larger areas or areas with high ceilings. To further assist an online heat calculator is available at hydroheat.com.au



Heat outputs shown in WATTS, based on Inlet Temp 80°C / Outlet Temp 60°C / Room Temp 20°C



Single Panel Type 11

Depth 63mm

Length	Height					
	mm	400	500	600	700	900
400	-	310	364	-	504	-
500	313	387	456	519	630	-
600	376	464	547	623	756	-
700	438	542	638	-	882	-
800	501	619	729	830	1,008	-
900	563	697	820	-	1,134	-
1000	626	774	911	1,038	1,260	-
1100	689	-	1,002	-	1,386	-
1200	751	929	1,093	-	1,512	-
1400	876	1,084	1,275	-	1,764	-
1600	1,002	1,238	1,458	-	2,016	-
1800	1,127	1,393	1,640	-	2,268	-
2000	1,252	1,548	1,822	-	-	-
Weight (kg)	16.13	20.39	24.65	28.94	37.43	-
Volume (Lt)	2.34	2.80	3.25	3.77	4.80	-



Double Panel Type 21

Depth 79mm

Length	Height				
	mm	500	600	700	900
400	-	491	-	-	-
500	531	614	694	845	-
600	637	736	832	1,014	-
700	743	859	971	1,183	-
800	850	982	1,110	1,352	-
900	956	1,104	1,248	1,521	-
1000	1,062	1,227	1,387	1,690	-
1100	-	1,350	-	-	-
1200	1,274	1,472	-	2,028	-
1400	1,487	1,718	-	2,366	-
1600	1,699	1,963	-	-	-
1800	1,912	2,209	-	-	-
2000	2,124	2,454	-	-	-
2200	-	2,699	-	-	-
2400	-	2,945	-	-	-
Weight (kg)	28.89	34.90	40.91	52.94	-
Volume (Lt)	5.63	6.60	7.63	9.70	-



Double Panel Type 22

Depth 102mm

Length	Height						
	mm	300	400	500	600	700	900
400	-	-	564	654	-	900	-
500	-	589	706	817	924	1,126	-
600	-	706	847	980	1,109	1,351	-
700	-	824	988	1,144	1,294	1,576	-
800	743	942	1,129	1,307	1,478	1,801	-
900	836	1,059	1,270	1,471	1,663	2,026	-
1000	929	1,177	1,411	1,634	1,848	2,251	-
1100	-	-	1,552	1,797	-	2,476	-
1200	1,115	1,412	1,693	1,961	-	2,701	-
1400	1,301	1,648	1,975	2,288	-	3,151	-
1600	1,486	1,883	2,258	2,614	-	3,602	-
1800	1,672	2,119	2,540	2,941	-	4,052	-
2000	1,858	2,354	2,822	3,268	-	-	-
2200	2,044	2,589	3,104	3,595	-	-	-
2400	2,230	2,825	3,386	3,922	-	-	-
2600	2,415	3,060	3,669	4,248	-	-	-
2800	2,601	3,296	3,951	4,575	-	-	-
3000	2,787	3,531	4,233	4,902	-	-	-
Weight (kg)	19.60	26.40	33.20	40.00	46.80	60.40	-
Volume (Lt)	3.70	4.67	5.63	6.60	7.63	9.70	-



Triple Panel Type 33


Depth 160mm

Length	Height						
	mm	300	400	500	600	700	900
400	-	-	807	933	-	1,290	-
500	-	-	1,009	1,166	1,319	1,613	-
600	-	-	1,210	1,399	1,582	1,935	-
700	-	-	1,412	1,632	1,846	2,258	-
800	1,077	1,352	1,614	1,866	2,110	2,580	-
900	1,211	1,521	1,815	2,099	2,373	2,903	-
1000	1,346	1,690	2,017	2,332	2,637	3,225	-
1100	-	-	2,219	2,565	-	3,548	-
1200	1,615	2,028	2,420	2,798	-	3,870	-
1400	1,884	2,366	2,824	3,265	-	4,515	-
1600	2,154	2,704	3,227	3,731	-	-	-
1800	2,423	3,042	3,631	4,198	-	-	-
2000	2,692	3,380	4,034	4,664	-	-	-
2200	2,961	3,718	4,437	5,130	-	-	-
2400	3,230	4,056	-	5,597	-	-	-
2600	3,500	4,394	-	-	-	-	-
2800	3,769	4,732	-	-	-	-	-
3000	4,038	5,070	-	-	-	-	-
Weight (kg)	28.00	38.13	48.27	58.40	68.53	88.80	-
Volume (Lt)	5.40	6.87	8.33	9.80	11.37	14.50	-

Henrad Everest Line Heat Outputs

Use the heat outputs & dimensions guides to configure radiators to your available wall space & calculate heat outputs to suit each room area. Single Panel type radiators are ideal for heating small spaces or rooms, whereas Double and Triple Panel types have greater heat output to suit larger areas or areas with high ceilings. To further assist an online heat calculator is available at hydroheat.com.au

Heat outputs shown in WATTS, based on Inlet Temp 80°C / Outlet Temp 60°C / Room Temp 20°C



Single Panel Type 11

Depth 63mm

Length	Height					
	mm	400	500	600	700	900
400	-	-	-	-	-	-
500	307	373	435	494	600	-
600	368	448	522	592	720	-
700	430	522	609	691	840	-
800	491	597	696	790	960	-
900	553	671	783	888	1,080	-
1000	614	746	870	987	1,200	-
1100	-	-	-	-	-	-
1200	737	895	1,044	1,184	1,440	-
1400	860	1,044	1,218	1,382	-	-
1600	982	1,194	1,392	1,579	-	-
1800	-	-	-	-	-	-
2000	1,228	1,492	1,740	-	-	-
Weight (kg)	16.2	20.23	24.27	28.30	35.90	-
Volume (L/t)	2.30	2.77	3.23	3.70	4.50	-



Double Panel Type 21

Depth 79mm

Length	Height				
	mm	500	600	700	900
400	-	-	-	-	-
500	519	598	675	825	-
600	623	718	810	989	-
700	727	837	945	1,154	-
800	830	957	1,080	1,319	-
900	934	1,076	1,215	1,484	-
1000	1,038	1,196	1,350	1,649	-
1100	-	-	-	-	-
1200	1,246	1,435	1,620	1,979	-
1400	1,453	1,674	1,890	-	-
1600	1,661	1,914	2,160	-	-
1800	-	-	-	-	-
2000	2,076	2,392	-	-	-
Weight (kg)	28.00	33.60	39.20	50.60	-
Volume (Lt)	5.20	6.25	7.30	9.00	-



Double Panel Type 22

Depth 102mm

Length	Height						
	mm	300	400	500	600	700	900
400	-	-	-	-	-	-	-
500	449	577	694	801	898	1,066	-
600	-	692	833	961	1,078	1,279	-
700	-	807	972	1,121	1,257	1,492	-
800	-	922	1,110	1,281	1,437	1,706	-
900	-	1,038	1,249	1,441	1,616	1,919	-
1000	898	1,153	1,388	1,601	1,796	2,132	-
1100	-	-	-	-	-	-	-
1200	-	1,384	1,666	1,921	2,155	2,558	-
1400	1,257	1,614	1,943	2,241	2,514	-	-
1600	-	1,845	2,221	2,562	2,874	-	-
1800	-	-	-	-	-	-	-
2000	1,796	2,306	2,776	3,202	-	-	-
Weight (kg)	19.30	25.67	32.03	38.40	44.70	57.30	-
Volume (Lt)	3.10	4.13	5.17	6.20	7.03	8.70	-



Triple Panel Type 33


Depth 160mm

Length	Height						
	mm	300	400	500	600	700	900
400	-	-	-	-	-	-	-
500	644	825	990	1,140	1,277	1,511	-
600	-	989	1,187	1,368	1,532	1,813	-
700	-	1,154	1,385	1,596	1,787	2,115	-
800	-	1,319	1,583	1,824	2,042	2,418	-
900	-	1,484	1,781	2,052	2,298	2,720	-
1000	1,287	1,649	1,979	2,280	2,553	3,022	-
1100	-	-	-	-	-	-	-
1200	-	1,979	2,375	2,736	3,064	3,626	-
1400	1,802	2,309	2,771	3,192	3,574	-	-
1600	-	2,638	3,166	3,648	4,085	-	-
1800	-	-	-	-	-	-	-
2000	2,574	3,298	3,958	4,560	-	-	-
Weight (kg)	27.60	36.63	45.67	54.70	63.60	81.40	-
Volume (Lt)	5.40	6.63	7.87	9.10	10.63	13.70	-

Heat
DONE
WELL

hydroheat.com.au





Hydroheat Supplies Pty. Ltd.


6 Helen Kob Drive
Braeside, Victoria 3195

Phone: (03) 9588 1299

Email: info@hydroheat.com.au

Web: hydroheat.com.au

Available from

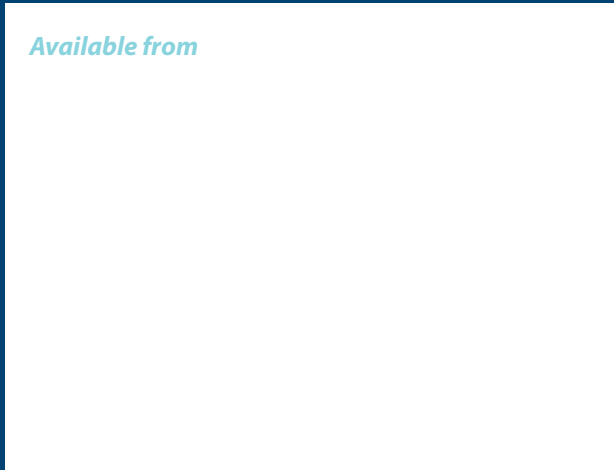

*For more details on the HydroHeat product range
call **03 9588 1299** or visit **hydroheat.com.au***